

## EMC TEST REPORT

For

SHENZHEN ABEST LIGHTING CO.,LTD.

Foldable led plant grow light

Test Model: YF-A08-SF01-720w

Additional Models : Please Refer To Page 8 Model List

Prepared for : SHENZHEN ABEST LIGHTING CO.,LTD.  
Address : 5Floor, Building8, HuaFeng Science and technology park,  
Tangwei, FuYong town, Bao an district, Shenzhen, China

Prepared by : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.  
Address : 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou  
Community, Matian Street, Guangming District, Shenzhen,  
China

Tel : (+86)755-29871520  
Fax : (+86)755-29871521  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 27, 2021  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : November 27, 2021 ~ December 03, 2021  
Date of Report : December 03, 2021



**EMC TEST REPORT**  
**EN IEC 55015:2019+A11:2020**

Limits and methods of measurement of radio disturbance characteristics of electrical lighting  
and similar equipment

**EN 61547: 2009**

Equipment for general lighting purposes - EMC immunity requirements

**Report Reference No.....: LCS211127017BE**

Date Of Issue.....: December 03, 2021

**Testing Laboratory Name.....: Shenzhen Southern LCS Compliance Testing Laboratory Ltd.**

Address.....: 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou  
Community, Matian Street,Guangming District, Shenzhen, China

Testing Location/ Procedure....: Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name.....: SHENZHEN ABEST LIGHTING CO.,LTD.**

Address.....: 5Floor, Building8, HuaFeng Science and technology park,  
Tangwei, FuYong town, Bao an district, Shenzhen, China

**Test Specification:**

Standard.....: EN IEC 55015:2019+A11:2020  
EN IEC 61000-3-2:2019+A1:2021  
EN 61000-3-3:2013/A2:2021  
EN 61547: 2009

Test Report Form No.....: SLCSEMC-2.2

TRF Originator.....: Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Master TRF.....: Dated 2016-08

**Shenzhen Southern LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description..... : Foldable led plant grow light**

Trade Mark.....: ABEST

Test Model.....: YF-A08-SF01-720w

Power Supply.....: 220-240V~, 50/60Hz, 720W

**Results ..... : PASS**

**Compiled by:**



**Supervised by:**



**Approved by:**



Amy Liu/ File administrators

Dm Gu/ Technique principal

Cherry Chen / Manager

**EMC - TEST REPORT**

<b>Test Report No. :</b> <b>LCS211127017BE</b>	<u>December 03, 2021</u> Date of issue
--	---

<b>Applicant.....:</b> <b>SHENZHEN ABEST LIGHTING CO.,LTD.</b> Address.....: 5Floor, Building8, HuaFeng Science and technology park, Tangwei, FuYong town, Bao an district, Shenzhen, China Telephone.....: / Fax.....: /
<b>Manufacturer.....:</b> <b>SHENZHEN ABEST LIGHTING CO.,LTD.</b> Address.....: 5Floor, Building8, HuaFeng Science and technology park, Tangwei, FuYong town, Bao an district, Shenzhen, China Telephone.....: / Fax.....: /
<b>Factory.....:</b> <b>SHENZHEN ABEST LIGHTING CO.,LTD.</b> Address.....: 5Floor, Building8, HuaFeng Science and technology park, Tangwei, FuYong town, Bao an district, Shenzhen, China Telephone.....: / Fax.....: /

<b>Test Result</b> according to the standards on page 6: <b>PASS</b>
--

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
00	December 03, 2021	Initial Issue	Cherry Chen



## TABLE OF CONTENTS

<b>1. REPORT INFORMATION DESCRIPTION.....</b>	<b>6</b>
1.1 Summary of Standards and Results.....	6
1.2 Product Information.....	8
1.3 Description of Test Facility.....	9
<b>2. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....</b>	<b>10</b>
<b>3. MEASURING DEVICES AND TEST EQUIPMENT.....</b>	<b>11</b>
<b>4. TEST DETAILS.....</b>	<b>13</b>
4.1 Conducted Disturbance.....	13
4.2 Radiated Disturbance (9kHz to 30MHz) .....	15
4.3 Radiated Disturbance (30MHz to 1000MHz) .....	16
4.4 Harmonic Current Emissions.....	18
4.5 Voltage Fluctuations & Flicker.....	20
4.6 Electrostatic Discharge Immunity Test.....	21
4.7 Radiated, Radio-Frequency, Electromagnetic Field Immunity Test.....	22
4.8 Electrical Fast Transient/Burst Immunity Test.....	24
4.9 Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields.....	25
4.10 Surge Immunity Test.....	27
4.11 Voltage Dips,Short Interruptions and Voltage Variations Immunity Test.....	28
<b>ANNEX A (Emission and Immunity test results) .....</b>	<b>29</b>
<b>ANNEX B (Test photograph) .....</b>	<b>46</b>
<b>ANNEX C (External and internal photos of the EUT) .....</b>	<b>51</b>

# 1. REPORT INFORMATION DESCRIPTION

## 1.1 Summary of Standards and Results

### 1.1.1 Description of Standards and Results

<b>EMISSION (EN IEC 55015:2019+A11:2020)</b>			
Description of Test Item	Test Standard	Limits	Results
Conducted Disturbance at the electric power supply interface	EN IEC 55015:2019+A11:2020	/	PASS
Conducted Disturbance at wired network interfaces	EN IEC 55015:2019+A11:2020	/	N/A <sup>1</sup>
Radiated Disturbance (9kHz to 30MHz)	EN IEC 55015:2019+A11:2020	2m	PASS
Radiated Disturbance (30MHz to 1000MHz)	EN IEC 55015:2019+A11:2020	/	PASS
Harmonic Current Emissions <sup>2</sup>	EN IEC 61000-3-2:2019+A1:2021	Class C	PASS
Voltage Fluctuations & Flicker <sup>3</sup>	EN 61000-3-3:2013/A2:2021	/	PASS
<b>IMMUNITY (EN 61547: 2009)</b>			
Description of Test Item	Test Standard	Basic Standard	Results
Electrostatic Discharge Immunity Test (ESD)	EN 61547: 2009	EN 61000-4-2	PASS
Radiated, Radio-Frequency, Electromagnetic Field Immunity Test (RS)	EN 61547: 2009	EN 61000-4-3	PASS
Power Frequency Magnetic Field Immunity Test	EN 61547: 2009	EN 61000-4-8	N/A <sup>1</sup>
Electrical Fast Transient/Burst Immunity Test (EFT)	EN 61547: 2009	EN 61000-4-4	PASS
Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields (CS)	EN 61547: 2009	EN 61000-4-6	PASS
Surge Immunity Test ( a.c. Power Ports)	EN 61547: 2009	EN 61000-4-5	PASS
Voltage Dips, Short Interruptions and Voltage Variations Immunity Test	EN 61547: 2009	EN 61000-4-11	PASS
Note 1: N/A is an abbreviation for not applicable.			
Note 2: according to EN IEC 61000-3-2:2019+A1:2021, for LED products < 5 watts, no limits are defined for the harmonics test, the EUT is deemed to comply with the standard without test.			
Note 3: according to EN 61000-3-3:2013/A2:2021 Clause A.2, Incandescent lamp luminaires with ratings less than or equal to 1 000 W and discharge and LED lamp luminaires with ratings less than or equal to 600 W, are deemed to comply with the standard and are not required to be tested.			

### 1.1.2 Performance Criteria

The performance of lighting equipment shall be assessed by monitoring:

- the luminous intensity of the luminaire or of the lamp(s).
- the functioning of the control in the case of equipment which includes a regulating control or concerns the regulating control itself.
- the functioning of the starting device, if any.

Performance criterion A: During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control.

Additional requirement for lighting equipment incorporating a starting device: After the test, the lighting equipment is switched off. After half an hour, it is switched on again. The lighting equipment shall start and operate as intended.



## 1.2 Product Information

### 1.2.1 EUT introduce

EUT : Foldable led plant grow light  
 Test Model : YF-A08-SF01-720w  
 Additional Models : See page 8 Model List  
 EUT Clock Frequency : /

### 1.2.2 Test Modes

Mode 1 : EUT was test with power on, to get the status 'Lighting'  
 Mode 2 : EUT was test with power on and keep charging, to get the status 'Charging'  
 Mode 3 : EUT was test with keep discharging, to get the status 'Discharging'  
 Mode 4 : EUT was test with max power, to get the status 'Full load'  
 Mode 5 : EUT was test with half power, to get the status 'Half load'

### 1.2.3 Test Auxiliary Equipment

Configuration	Model	Rating	Manufacturer

### 1.2.4 General Product Information

The EUTs are general luminaires for illumination purpose. detailed differences shown in below.

Model list:

Model	Rating
YF-A08-SFXX-720w	220-240V~, 50/60Hz, 720W
YF-A08-SFXX-680w	220-240V~, 50/60Hz, 680W
YF-A08-SFXX-650w	220-240V~, 50/60Hz, 650W
YF-A08-SFXX-600w	220-240V~, 50/60Hz, 600W
YF-A06-SFXX-480w	220-240V~, 50/60Hz, 480W
Remarks: XX=01,02,03,04,05 means difference spectrum	



### 1.3 Description of Test Facility

Test Facilities : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.  
101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.  
TUV RH Registration Number. is UA 50418075 0001.  
UL Registration Number. is 100571-492.  
NVLAP Registration Code is 600112-0.  
CNAS Registration Number is L10160.

Radiated, Radio-Frequency, Electromagnetic Field Immunity Test (RS) : Shenzhen LCS Compliance Testing Laboratory Ltd.  
101, 201 Building A and 301 Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, Guangdong, China.  
CNAS Registration Number is L4595.  
CMA Registration Number is 201819013358.

Note : Radiated, Radio-Frequency, Electromagnetic Field Immunity Test (RS) Subcontract To Shenzhen LCS Compliance Testing Laboratory Ltd for Testing.



## 2. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Test	Parameters	Expanded uncertainty ( $U_{lab}$ )	Expanded uncertainty ( $U_{cispr}$ )
Conducted Disturbance	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	$\pm 1.40$ dB $\pm 2.80$ dB	$\pm 4.0$ dB $\pm 3.6$ dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	$\pm 3.46$ dB	N/A
Radiated Disturbance	Level accuracy (9kHz to 30MHz)	$\pm 3.12$ dB	N/A
Radiated Disturbance	Level accuracy (30MHz to 200MHz)	$\pm 4.66$ dB	$\pm 5.2$ dB
Radiated Disturbance	Level accuracy (200MHz to 1000MHz)	$\pm 4.64$ dB	$\pm 5.0$ dB
Harmonic Current	Voltage	$\pm 0.640\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.530\%$	N/A

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### 3. MEASURING DEVICES AND TEST EQUIPMENT

#### Conducted Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	EMI Test Receiver	R&S	ESCI	101142	2022-06-08
2	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2022-06-08
3	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2022-06-08
4	EMI Test Software	EZ	EZ_EMG	N/A	/
5	Asymmetric Artificial Network	SCHWARZBECK	NTFM 8158	NTFM 8158#120	2022-06-08
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2022-06-08
7	No. 2 shielded room	CHENGYU	843	/	2023-06-16

#### Radiated Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	EMI Test Receiver	R&S	ESCI	101142	2022-06-08
2	Triple-loop Antenna	EVERFINE	LLA-2	9161	2022-06-08
3	EMI Test Software	EZ	EZ_EMG	N/A	/
4	No. 2 shielded room	CHENGYU	843	/	2023-06-16

#### Radiated Disturbance

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2024-06-15
2	EMI Test Receiver	R&S	ESCI3	101010	2022-06-08
3	Spectrum analyzer	Agilent	N9020A	MY49100699	2022-06-08
4	Log per Antenna	SCHWARZBECK	VULB9163	5094	2022-06-23
5	Horn antenna	ETS-LINDGREN	3115	00034771	2022-06-23
6	EMI Test Software	EZ	EZ_EMG	N/A	/
7	Positioning Controller	MF	BK8807-4A-2T	2016-0808-008	/

#### Harmonic Current&Voltage Fluctuation and Flicker

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	Harmonic Current and Flicker Test System	HTEC	AC2000A	/	2022-06-08
2	Linear variable frequency power supply	HTEC	HHF-5010	/	2022-06-08

#### Electrostatic Discharge Immunity Test (ESD)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	ESD Simulator	TESEQ	NSG 437	1615	2022-03-24

#### Electrical Fast Transient/Burst Immunity Test (EFT)

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
------	----------------	--------------	-----------	------------	-----------

1	Electrical fast transient(EFT)generator	HTEC	HEFT51	162201	2022-06-10
2	Coupling Clamp	HTEC	H3C	163701	2022-05-13

**Surge Immunity Test**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	Surge Generator	3CTEST	SG5006G	EC5581070	2022-05-13
2	Coupling/decoupling Network	3CTEST	SGN-5010G	EC5591033	2022-05-13

**Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2022-06-08
2	Coupling network	HTEC	CDN-M2+M3	A22/0382/2016	2022-06-08
3	Attenuator 6dB	HTEC	ATT6	HA1601	2022-06-08
4	Electromagnetic clamp	LUTHI	EM101	35535	2022-06-08

**Power Frequency Magnetic Field Immunity Test**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	Power frequency mag-field generator System	HTEC	HPFMF100	100-2400	2022-06-08

**Voltage Dips,Short Interruptions and Voltage Variations Immunity Test**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	Voltage dips and up generator	HTEC	HPFS161P	162202	2022-06-10


**Radiated, Radio-Frequency, Electromagnetic Field Immunity Test**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Due Date.
1	RS Test Software	Tonscend	/	/	N/A
2	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2022-11-14
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-11
4	RF POWER AMPLIFIER	OPHIR	5225R	1052	2022-11-21
5	RF POWER AMPLIFIER	OPHIR	5273F	1019	2022-11-21
6	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	2022-11-21
7	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-484	2022-11-21
8	RS Test Software	Tonscend	/	/	2022-03-24

## 4. TEST DETAILS

### 4.1 Conducted Disturbance

#### 4.1.1 Block Diagram of Test Setup

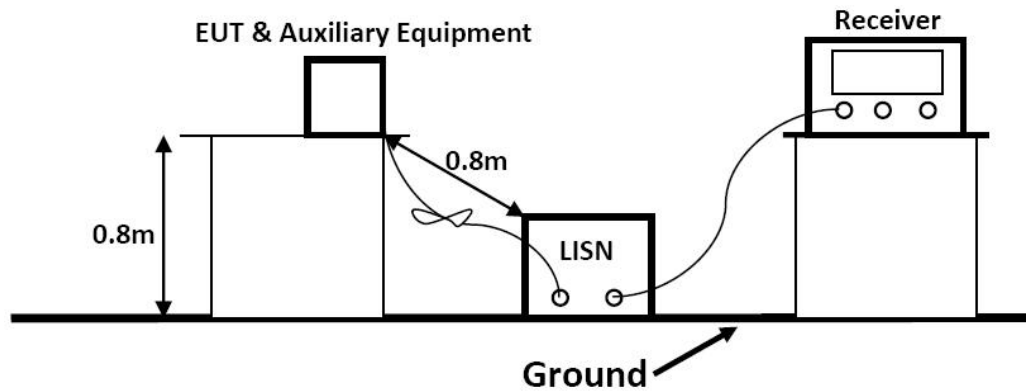

#### 4.1.2 Test Standard

EN IEC 55015:2019+A11:2020

#### 4.1.3 Limits

Disturbance voltage limits at the electric power supply interface		
Frequency range	Limits (dB $\mu$ V)*	
	Quasi-peak	Average
9kHz to 50kHz	110	--
50kHz to 150kHz	90 ~ 80*	--
150kHz to 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz to 5.0MHz	56	46*
5.0MHz to 30MHz	60	50

NOTE 1: at the transition frequency, the lower limit applies.

NOTE 2: The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz.

Disturbance voltage limits at wired network interfaces other than power supply		
Frequency range	Limits (dB $\mu$ V)*	
	Quasi-peak	Average
0.15MHz to 5.0MHz	84 to 74	74 to 64
5.0MHz to 30MHz	74	64

NOTE: The disturbance voltage limits are derived for use with an artificial asymmetrical network (AAN) which presents a common mode (asymmetric mode) impedance of 150  $\Omega$  to the measured interface.



<b>Disturbance voltage limits of local wired ports: electrical power supply interface of non-restricted ELV lamps</b>		
Frequency range	Limits (dB $\mu$ V)*	
	Quasi-peak	Average
9kHz to 50kHz	136	--
50kHz to 150kHz	116 ~ 106*	--
150kHz to 0.5MHz	92 ~ 82*	82 ~ 72*
0.5MHz to 5.0MHz	82	72*
5.0MHz to 30MHz	86	76

NOTE: The limits in this table apply if no 26 dB attenuator is applied.

<b>Disturbance voltage limits at local wired ports: local wired ports other than electrical power supply interface of ELV lamp</b>		
Frequency range	Limits (dB $\mu$ V)*	
	Quasi-peak	Average
0.15MHz to 5.0MHz	80	70
5.0MHz to 30MHz	74	64

#### 4.1.4 Test Procedure Description

The EUT is put on the table which is 0.8 meter high above the ground, and connected to the AC mains through a Line Impedance Stabilization Network (LISN). EUT is powered by V-type artificial power network, and the distance from LISN/ISN is 0.8m. The part of the EUT power cord exceeding 0.8m folds in parallel to form a 0.3-0.4 m eight harness.


The bandwidth of the test receiver is set at 200Hz in 9k~150kHz range and 9kHz in 150k~30MHz range.

#### 4.1.5 Test Results

Refer to Annex A.1

## 4.2 Radiated Disturbance (9kHz to 30MHz)

### 4.2.1 Block Diagram of Test Setup

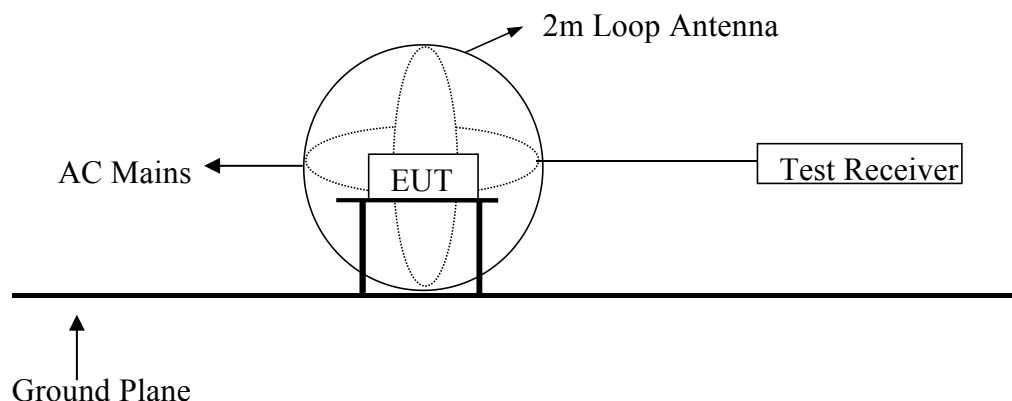

### 4.2.2 Test Standard

EN IEC 55015:2019+A11:2020

### 4.2.3 Limits

LLAS radiated disturbance limits in the frequency range 9 kHz to 30 MHz	
Frequency range	Limits for loop diameter (dB $\mu$ A)
	2m
9kHz to 70kHz	88
70kHz to 150kHz	88 to 58*
150kHz to 3.0MHz	58 to 22*
3.0MHz to 30MHz	22

NOTE1: At the transition frequency the lower limit applies.

NOTE2: Decreasing linearly with logarithm of the frequency.

### 4.2.4 Test Procedure Description

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.


The frequency range from 9kHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9kHz to 150kHz, the bandwidth of the field strength meter is set at 200Hz. For frequency band 150kHz to 30MHz, the bandwidth is set at 9kHz.

### 4.2.5 Test Results

Refer to Annex A.2

## 4.3 Radiated Disturbance (30MHz to 1000MHz)

### 4.3.1 Block Diagram of Test Setup

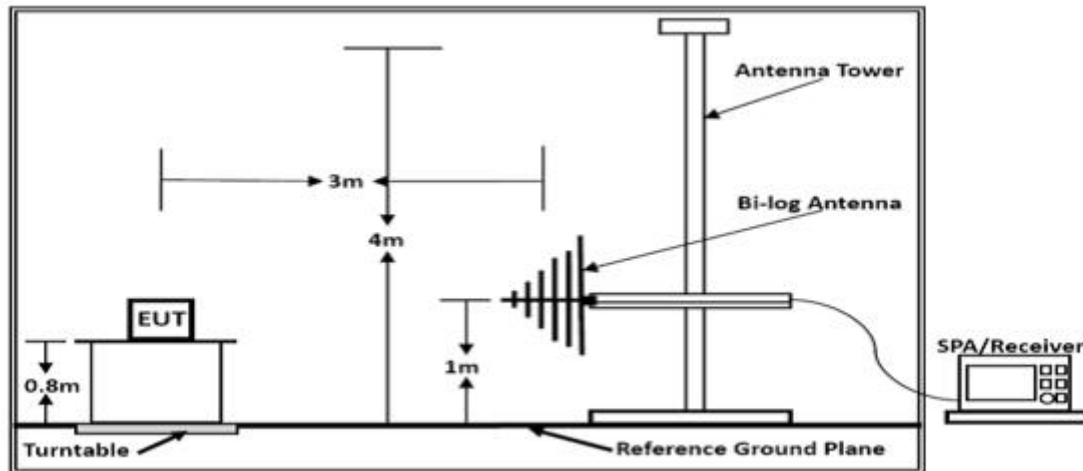

### 4.3.2 Test Standard

EN IEC 55015:2019+A11:2020

### 4.3.3 Limits

SAC Radiated disturbance limits and associated measurement methods in the frequency range 30 MHz to 1 GHz (at 3 m distance)	
Frequency range (MHz)	Quasi-Peak Limits(dB $\mu$ V/m)
30 ~ 230	40
230 ~ 1000	47

NOTE1: at the transition frequency, the lower limit applies.

NOTE2: Distance refers to the distance in meters between the measuring instrument antenna geometric center and the closed point of any part of the EUT.

NOTE3: Testing method which the Semi Anechoic Chamber

### 4.3.4 Test Procedure Description

The Radiated Disturbance test was conducted in a 3M Semi Anechoic Chamber and conforming to CISPR 16. The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the Receiver is set at 120kHz ; The frequency range from 30MHz to 1000MHz is investigated.


### 4.3.5 Test Results

Refer to Annex A.3



## 4.4 Harmonic Current Emissions

### 4.4.1 Block Diagram of Test Setup

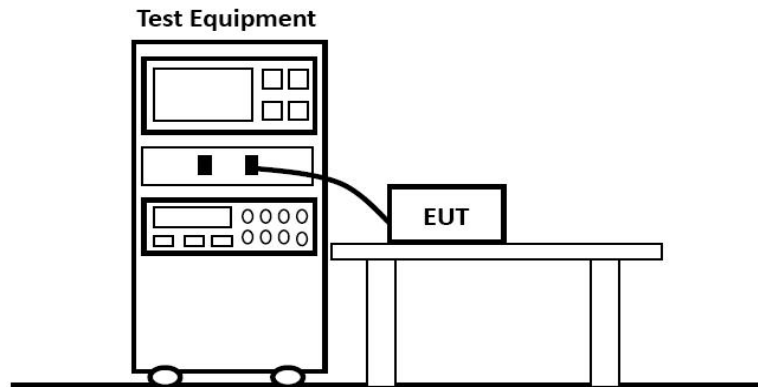

### 4.4.2 Test Standard

EN IEC 61000-3-2:2019+A1:2021 (for Class C equipment)

### 4.4.3 Limits

**Rated Power > 25W:**

Harmonic order n	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$27 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq h \leq 39$ (odd harmonics only)	3


**Rated power  $\geq 5$  W and  $\leq 25$  W:**

Lighting equipment having a rated power greater than or equal to 5 W and less than or equal to 25 W shall comply with one of the following three sets of requirements:

- the harmonic currents shall not exceed the power-related limits of Table;

Harmonic order n	Maximum permissible harmonic current per watt mA/W
3	3,4
5	1,9
7	1,0
9	0,5
11	0,35
$13 \leq h \leq 39$ (odd harmonics only)	3,85/h

- the third harmonic current, expressed as a percentage of the fundamental current, shall not exceed 86 % and the fifth harmonic current shall not exceed 61 %. In addition, the waveform of the input current shall be such that it reaches the 5 % current threshold before or at  $60^\circ$ , has its peak value before or at  $65^\circ$  and does not fall below the 5 % current threshold before  $90^\circ$ , referenced to any zero crossing of the fundamental supply voltage. The current threshold is 5 % of the highest absolute peak value that occurs in the measurement window, and the phase angle measurements are made on the cycle that includes this absolute peak value.

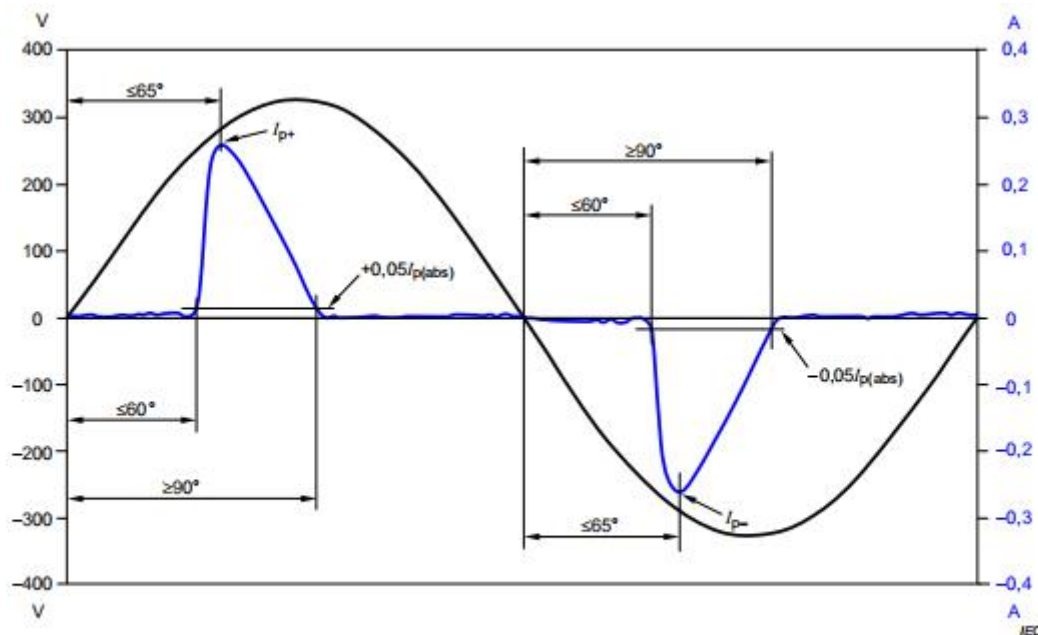

NOTE  $I_{p(abs)}$  is the higher absolute value of  $I_{p+}$  and  $I_{p-}$ .


- the THD shall not exceed 70 %. The third order harmonic current, expressed as a percentage of the fundamental current, shall not exceed 35 %, the fifth order current shall not exceed 25 %, the seventh order current shall not exceed 30 %, the ninth and eleventh order currents shall not exceed 20 % and the second order current shall not exceed 5 %.

#### 4.4.4 Test Results

Refer to Annex A.4

## 4.5 Voltage Fluctuations & Flicker

### 4.5.1 Block Diagram of Test Setup

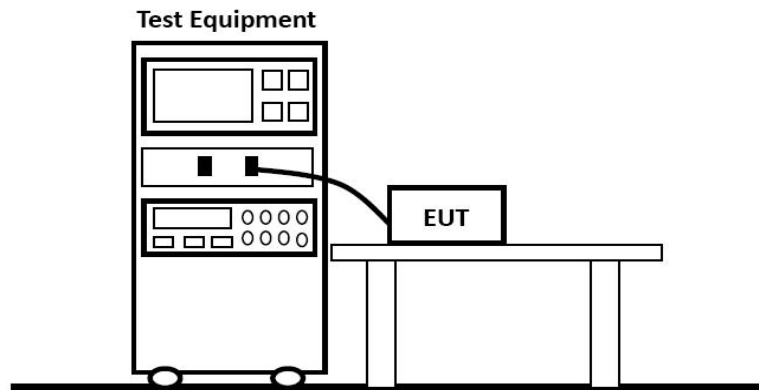

### 4.5.2 Test Standard

EN 61000-3-3:2013/A2:2021


### 4.5.3 Test Results

Refer to Annex A.5



## 4.6 Electrostatic Discharge Immunity Test

### 4.6.1 Block Diagram of Test Setup

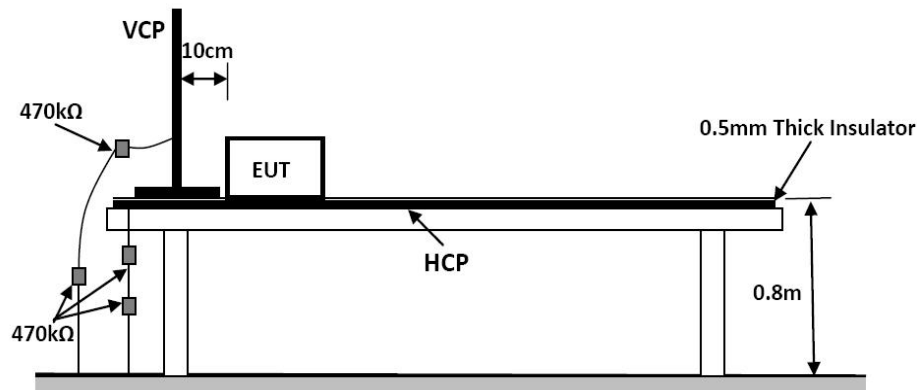

### 4.6.2 Test Standard

EN 61547:2009

### 4.6.3 Limits

Electrostatic discharges — Test levels				
Discharge Type	Discharge Level (KV)		Number of discharges (Each point)	Performance Criteria
	+	-		
Air Discharge-Direct	2, 4, 8	2, 4, 8	20	B
Contact Discharge-Direct	2, 4	2, 4	20	
Contact Discharge- Indirect	2, 4	2, 4	20	

### 4.6.4 Test Procedure

#### a) Air Discharge

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

#### b) Contact Discharge

This test is done on a conductive surfaces. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

#### c) Indirect Discharge For Horizontal Coupling Plane and Vertical Coupling Plane


At least 20(+/- 10 times at each pole) single discharges shall be applied to the coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane. with a time interval of at least 1 second between each discharge.

### 4.6.5 Test Results

Refer to Annex A.6

### 4.7 Radiated, Radio-Frequency, Electromagnetic Field Immunity Test

#### 4.7.1 Block Diagram of Test Setup

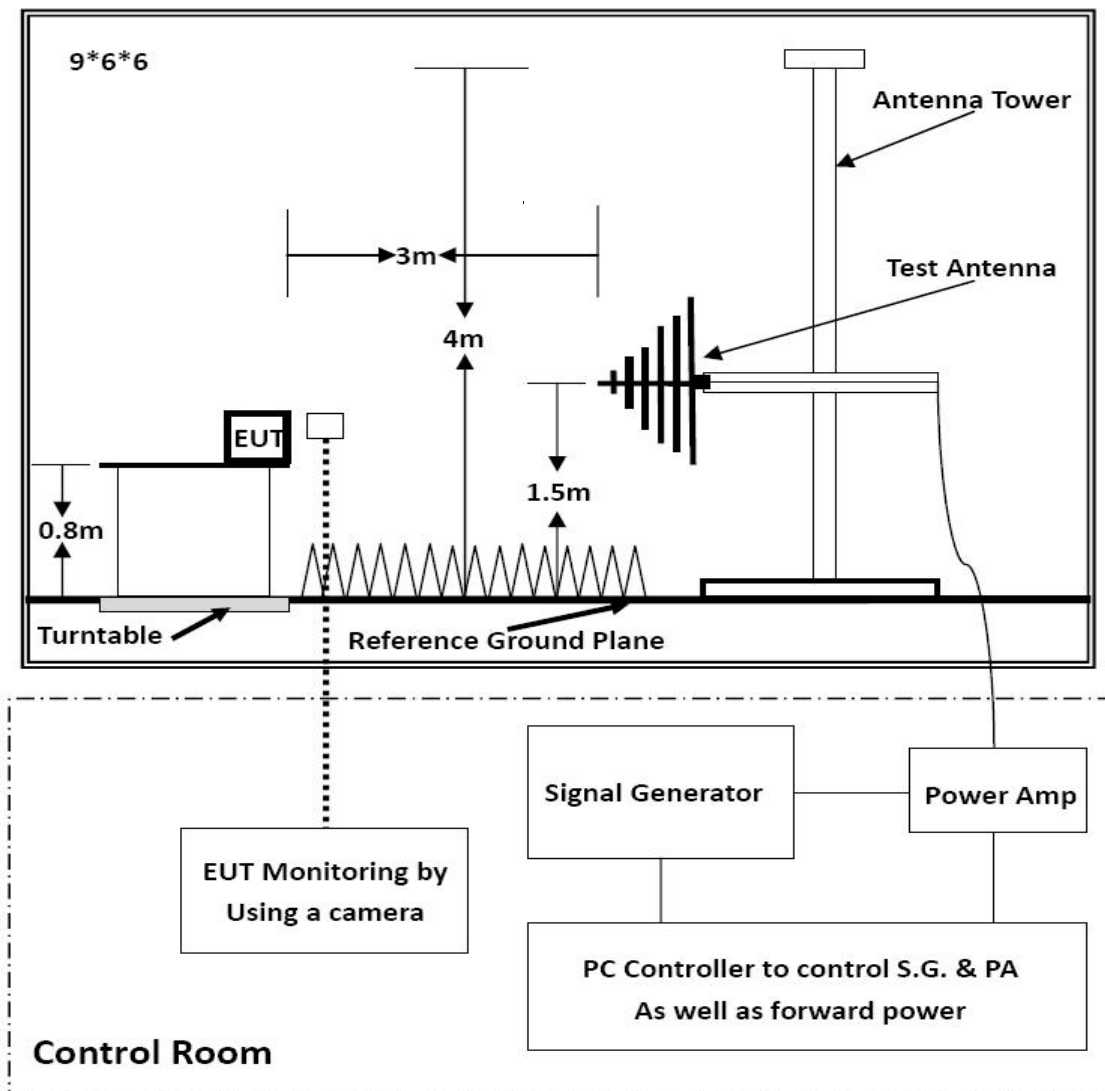

#### 4.7.2 Test Standard

EN 61547:2009

#### 4.7.3 Limits

Radio-frequency electromagnetic fields – Test levels		
Characteristics	Test levels	Performance Criteria
Frequency range	80 MHz to 1 000 MHz	A
Test level	3 V/m (unmodulated)	
Modulation	1 kHz, 80 % AM, sine wave	

#### **4.7.4 Test Procedure**

The test was carried out in a half-wave anechoic chamber with absorbent material attached to a reflective ground plate.

Before the test, the test field strength needs to be calibrated. During the calibration, the corresponding relationship between the target field strength and the forward power applied to the transmitting antenna is established. During the test, except for EUT, the indoor layout is consistent with the calibration.


The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

#### **4.7.5 Test Results**

Refer to Annex A.6

## 4.8 Electrical Fast Transient/Burst Immunity Test

### 4.8.1 Block Diagram of Test Setup

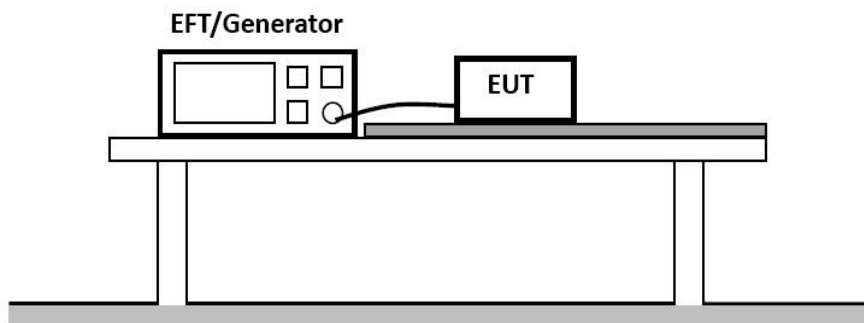

### 4.8.2 Test Standard

EN 61547:2009

### 4.8.3 Limits

Fast transients - Test levels at input and output a.c. power ports						
Test Levels	Repetition Frequency	Burst Duration	Burst Period	Test Duration	Coupling Method	Performance Criteria
±1 kV	5 kHz	15ms	300ms	2 min per polarity	Direct	B

Fast transients - Test levels at input and output d.c. power ports						
Test Levels	Repetition Frequency	Burst Duration	Burst Period	Test Duration	Coupling Method	Performance Criteria
±0.5kV	5 kHz	15ms	300ms	2 min per polarity	Direct	B

Note: Not applicable to equipment not connected to the mains while in use.

### 4.8.4 Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.


The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC or DC power lines. Both polarities of the test voltage should be applied during compliance test, Fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity

### 4.8.5 Test Results

Refer to Annex A.6

## 4.9 Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields

### 4.9.1 Block Diagram of Test Setup

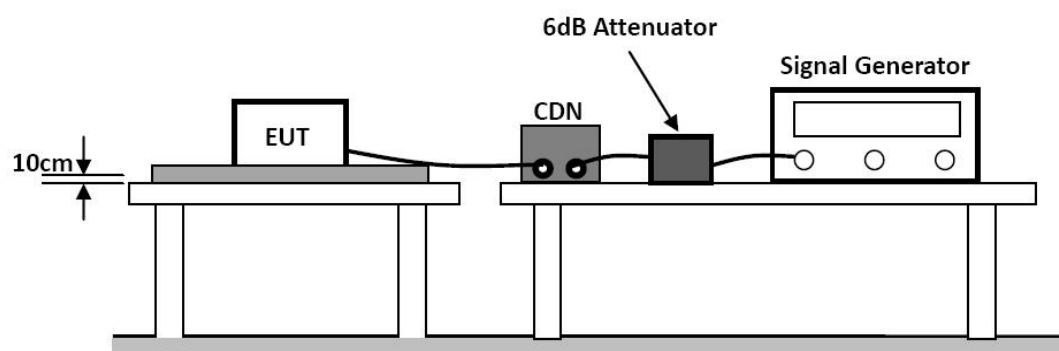

### 4.9.2 Test Standard

EN 61547:2009

### 4.9.3 Limits

Radio-frequency common mode – Test levels at input and output a.c. power ports					
Frequency range (MHz)	Test Level (V/m)	Modulation Signal	Coupling Method	Steps	Performance Criteria
0.15 to 80	3	1kHz, 80%, AM, Sine wave	CDN	1%	A

Note: Only applicable to ports interfacing with cables whose total length, according to the manufacturer's specification, may exceed 3 m.

Radio-frequency common mode – Test levels at input and output d.c. power ports					
Frequency range (MHz)	Test Level (V/m)	Modulation Signal	Coupling Method	Steps	Performance Criteria
0.15 to 80	3	1kHz, 80%, AM, Sine wave	CDN	1%	A

Note: Only applicable to equipment that is connected to the mains while in use.



#### 4.9.4 Test Procedure

a) The EUT are placed on an insulated wooden table 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

b) The test signal is sent to the coupling device through the 6dB attenuator, and then injected into the EUT test port by the common mode of the coupling device. The power port is injected use CDN. The signal line and control line are injected use Electromagnetic Injection Clamp

c) The frequency range is swept from 150kHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.


#### 4.9.5 Test Results

Refer to Annex A.6



### 4.10 Surge Immunity Test

#### 4.10.1 Block Diagram of Test Setup

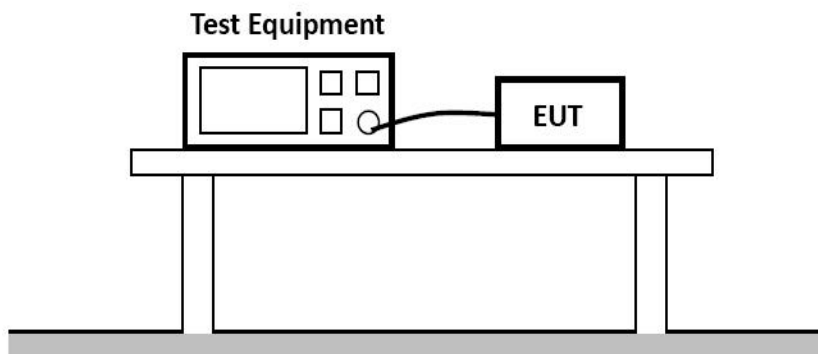

#### 4.10.2 Test Standard

EN 61547:2009

#### 4.10.3 Limits

Surges – Test levels at input a.c. power ports					
Characteristics	Device			Performance Criteria	
	Self-ballasted lamps and semi-luminaires	Luminaires and independent auxiliaries			
		Input power			
		≤25	>25 W		
Wave-shape data	1.2/50 μs	1.2/50 μs	1.2/50 μs	C	
Test Levels	line to line	±0.5 kV	±0.5 kV		±1.0 kV
	line to ground	±1.0 kV	±1.0 kV		±2.0 kV

Note: In addition to the specified test level, all lower test levels as detailed in IEC 61000-4-5 should also be satisfied.

#### 4.10.4 Test Procedure


- a) The surge is applied to the EUT power supply terminal via the capacitive coupling network, to the EUT power supply provide a 1.0KV 1.2/50us voltage surge (at open-circuit condition).
- d) At least 5 positive and 5 negative (polarity) tests with 1/min repetition rate are conducted during test. and phase angles is 90° and 270° .
- c) Different phase angles and line-to-line, line-to-ground coupling mode measurements
- d) line-to-line coupling mode, the Generator impedance is 2 Ω , line-to-ground coupling mode,the Generator impedance is 12Ω.

#### 4.10.5 Test Results

Refer to Annex A.6

## 4.11 Voltage Dips, Short Interruptions and Voltage Variations Immunity Test

### 4.11.1 Block Diagram of Test Setup

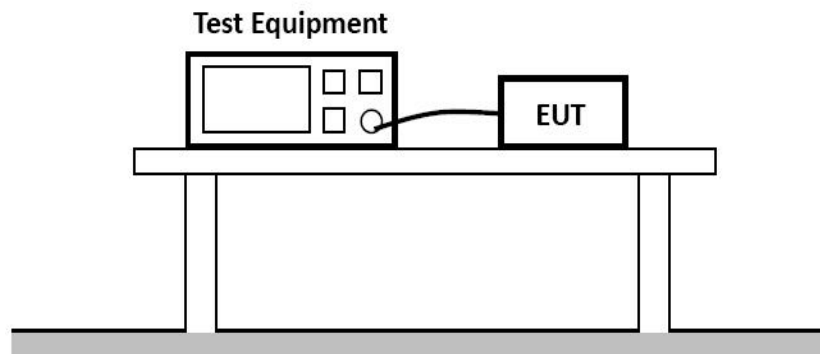

### 4.11.2 Test Standard

EN 61547:2009

### 4.11.3 Limits

Voltage dips and short interruptions-Test levels at input a.c. power ports			
	Test Level	Duration	Performance criterion
Voltage dips	70% of Vnom	10 cycle(50Hz)	C
Short Interruptions	0% of Vnom	0.5 cycle(50Hz)	B

### 4.11.4 Test Procedure

- The EUT shall be connected to the test generator for testing using the shortest power cable specified by the EUT manufacturer and, if no cable length is specified, the shortest cable suitable for the EUT.
- The interruptions is introduced at selected phase angles with specified duration.
- EUT shall carry out tests in accordance with the prescribed test grade and duration, and the test interval is 10s

### 4.11.5 Test Results

Refer to Annex A.6


## ANNEX A

### (Emission and Immunity test results)

#### A.1 Conducted Disturbance Test Results

Environmental Conditions:	23.9°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	Line


Detailed results are shown below

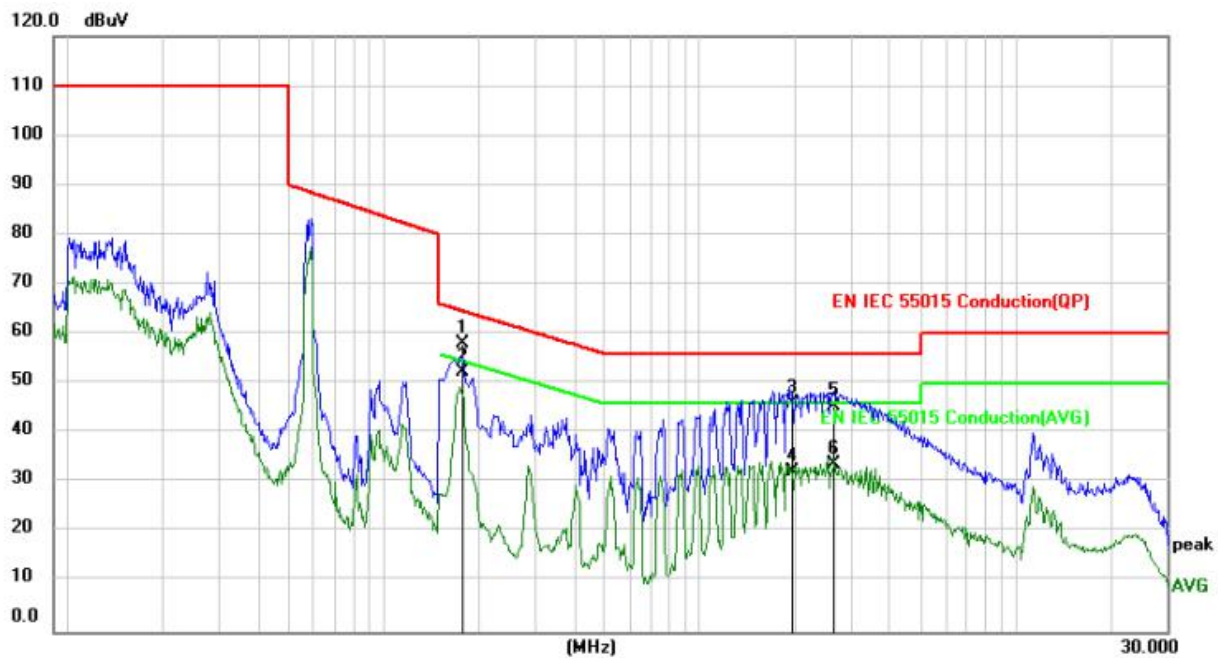

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1754	47.84	10.23	58.07	64.70	-6.63	QP	
2	*	0.1754	42.12	10.23	52.35	54.70	-2.35	AVG	
3		1.9563	35.88	10.20	46.08	56.00	-9.92	QP	
4		1.9563	22.12	10.20	32.32	46.00	-13.68	AVG	
5		2.6666	35.25	10.20	45.45	56.00	-10.55	QP	
6		2.6666	23.41	10.20	33.61	46.00	-12.39	AVG	

Environmental Conditions:	23.9°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	Neutral

Detailed results are shown below

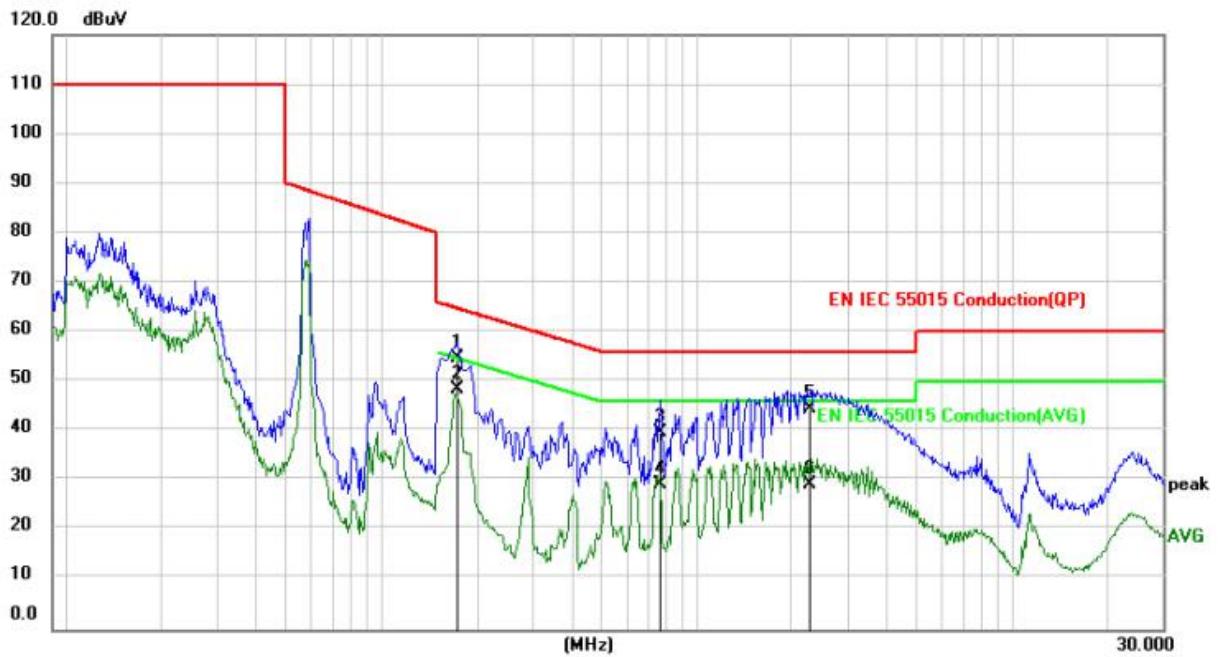


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1749	44.52	10.23	54.75	64.72	-9.97	QP	
2	*	0.1749	38.28	10.23	48.51	54.72	-6.21	AVG	
3		0.7637	29.69	10.20	39.89	56.00	-16.11	QP	
4		0.7637	19.02	10.20	29.22	46.00	-16.78	AVG	
5		2.2895	34.34	10.20	44.54	56.00	-11.46	QP	
6		2.2895	19.09	10.20	29.29	46.00	-16.71	AVG	

Note Measure-ment = Reading Level + Correct Factor

### A.2 Radiated Disturbance Test Results (9kHz to 30MHz)

Environmental Conditions:	23.9°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	X


Detailed results are shown below

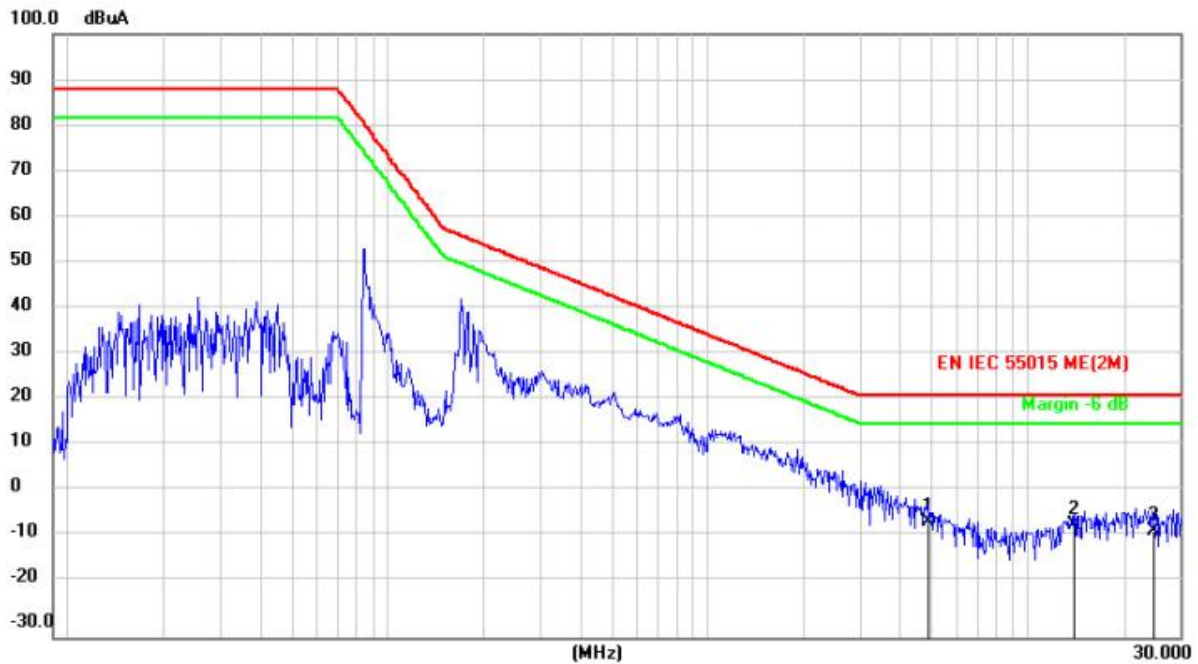

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1	*	4.8752	7.16	-12.26	-5.10	22.00	-27.10	QP	
2		13.9946	17.00	-22.70	-5.70	22.00	-27.70	QP	
3		24.8931	27.23	-34.17	-6.94	22.00	-28.94	QP	

Environmental Conditions:	23.9°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	Y

Detailed results are shown below

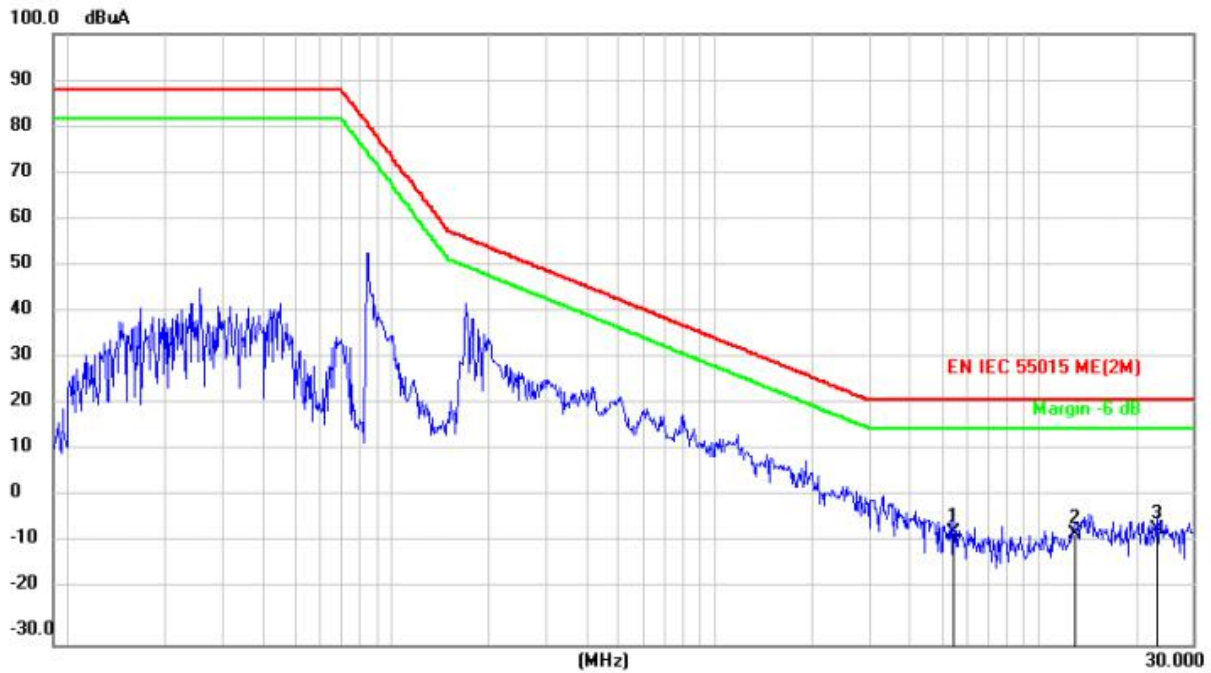


No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		5.4615	7.41	-13.63	-6.22	22.00	-28.22	QP	
2		13.0096	15.41	-21.86	-6.45	22.00	-28.45	QP	
3	*	23.1414	27.73	-33.24	-5.51	22.00	-27.51	QP	



Environmental Conditions:	23.9°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	Z

Detailed results are shown below

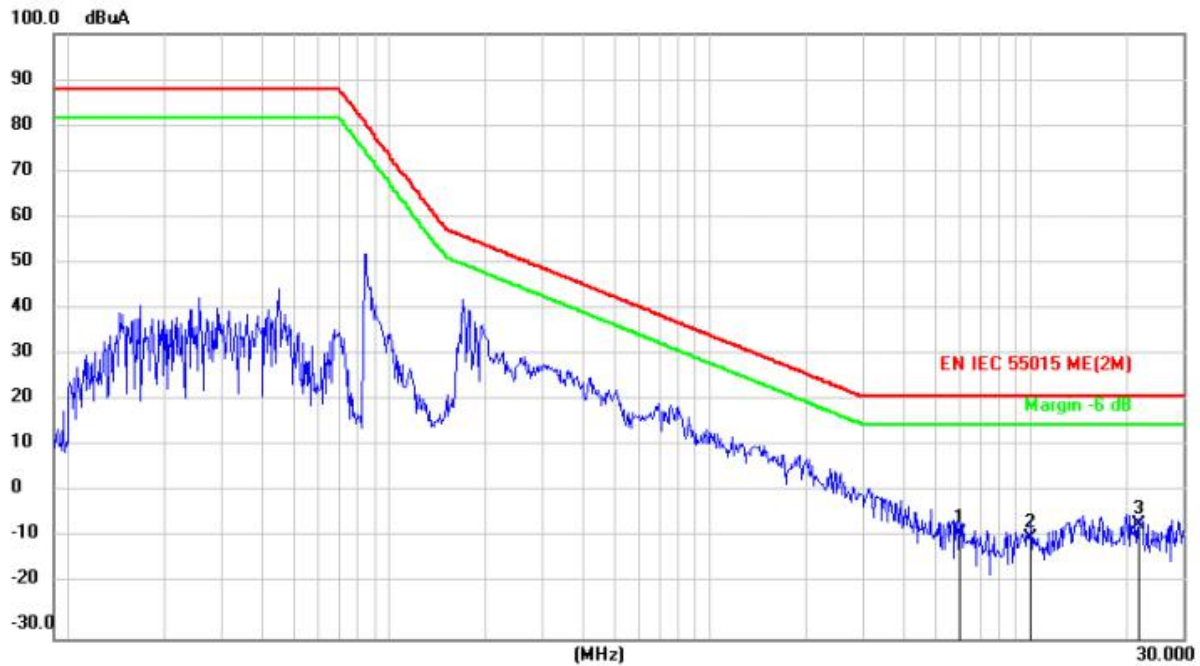

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		6.0198	7.63	-14.93	-7.30	22.00	-29.30	QP	
2		10.0350	12.14	-20.41	-8.27	22.00	-30.27	QP	
3	*	21.8640	27.00	-32.46	-5.46	22.00	-27.46	QP	

Note Measure-ment = Reading Level + Correct Factor



### A.3 Radiated Disturbance Test Results (30MHz to 1000MHz)

Environmental Conditions:	23.3°C, 56% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	Vertical

Detailed results are shown below



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		116.0304	20.32	12.23	32.55	40.00	-7.45	QP			
2	*	142.6992	19.64	13.56	33.20	40.00	-6.80	QP			
3		149.9451	18.94	13.48	32.42	40.00	-7.58	QP			

Environmental Conditions:	23.3°C, 56% RH
Test Voltage:	AC 230V,50Hz
Test Model:	YF-A08-SF01-720w
Test Mode:	Mode 1
Test Engineer:	Sam Chen
Pol:	Horizontal

Detailed results are shown below



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		115.5736	21.19	12.07	33.26	40.00	-6.74	QP			
2	*	155.9101	23.98	9.61	33.59	40.00	-6.41	QP			
3		224.6177	17.99	12.41	30.40	40.00	-9.60	QP			

Note Measure-ment = Reading Level + Correct Factor


### A.4 Harmonic Current Emissions Test Results

Environmental Conditions:	23.9°C, 53% RH
Test Model:	YF-A08-SF01-720w
Test Voltage:	AC 230V,50Hz
Test Mode:	Mode 1
Test Engineer:	Sam Chen


Detailed results are shown below

Test Result: **pass** Source qualification(Power Off Load): **Idle - Pass**

**Current & voltage waveforms**

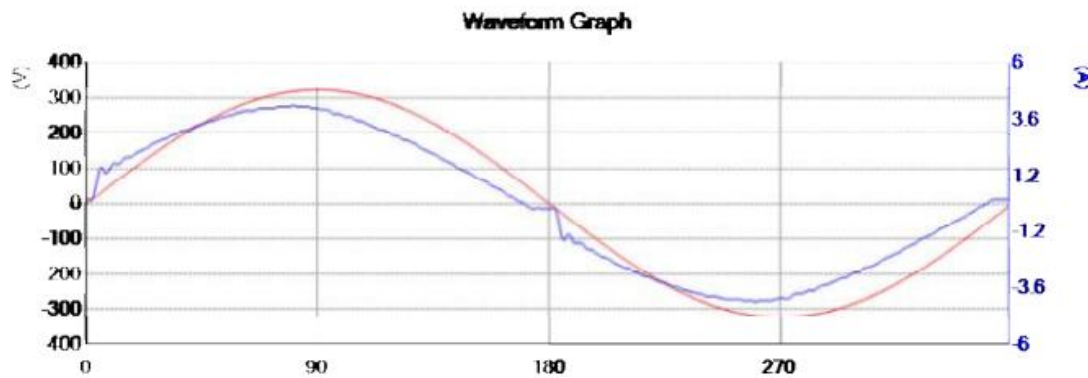

**Harmonics and Class C limit line (>25W)**

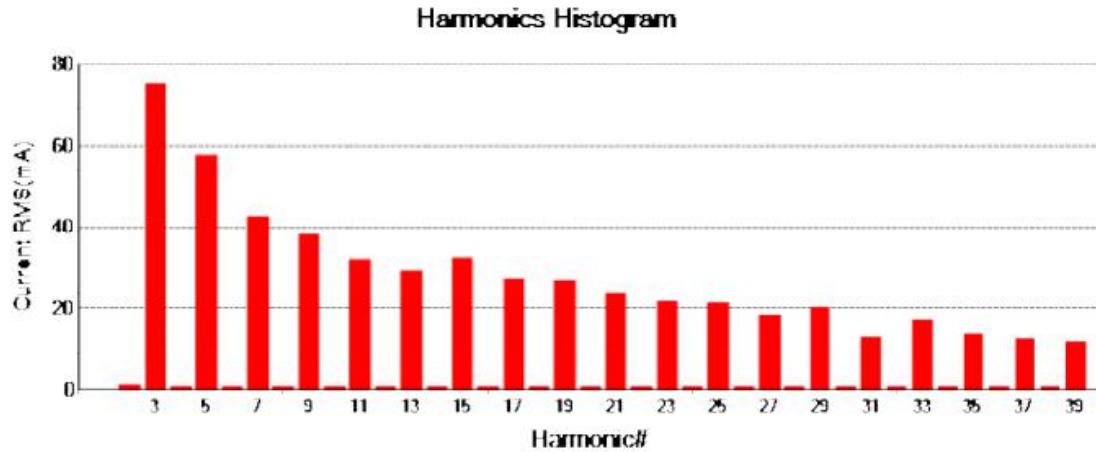

Environmental Conditions:	23.9°C, 53% RH
Test Model:	YF-A08-SF01-720w
Test Voltage:	AC 230V,50Hz
Test Mode:	Mode 1
Test Engineer:	Sam Chen

Detailed results are shown below

**Source qualification(Power Off Load): Pass**

Measurements are compliant with IEC/EN61000-3-2 Ed. 4 & IEC/EN61000-4-7 Ed. 2.1

	Nominal	Measured	Measured	Deviation	Allowed	Result
		Low	High		Deviation	
Supply Voltage	230	229.23	229.52	-0.77	4.6	Pass
Supply Frequency	50	50.0	50.0	0.0	0.25	Pass
Crest Phase	90.0	89.5	89.8	-0.5	3.0	Pass
Crest Factor	1.414	1.413	1.414	-0.001	-0.014/0.006	Pass
Fundamental Voltage	229.36	-	-	-	-	-

Harm#	Harmonics Voltage	Harmonic Ratio	Limit	Result
2	0.010	0.042	0.200	Pass
3	0.150	0.094	0.900	Pass
4	0.020	0.033	0.200	Pass
5	0.070	0.049	0.400	Pass
6	0.020	0.018	0.200	Pass
7	0.030	0.024	0.300	Pass
8	0.000	0.007	0.200	Pass
9	0.010	0.014	0.200	Pass
10	0.010	0.010	0.100	Pass
11	0.020	0.011	0.100	Pass
12	0.000	0.004	0.100	Pass
13	0.010	0.009	0.100	Pass
14	0.010	0.003	0.100	Pass
15	0.020	0.013	0.100	Pass
16	0.000	0.003	0.100	Pass
17	0.020	0.012	0.100	Pass
18	0.000	0.003	0.100	Pass
19	0.020	0.010	0.100	Pass
20	0.010	0.003	0.100	Pass
21	0.020	0.016	0.100	Pass
22	0.000	0.000	0.100	Pass
23	0.020	0.013	0.100	Pass
24	0.000	0.001	0.100	Pass
25	0.020	0.011	0.100	Pass
26	0.000	0.003	0.100	Pass
27	0.020	0.010	0.100	Pass
28	0.000	0.000	0.100	Pass
29	0.020	0.013	0.100	Pass
30	0.000	0.000	0.100	Pass
31	0.010	0.008	0.100	Pass
32	0.000	0.003	0.100	Pass
33	0.020	0.010	0.100	Pass
34	0.000	0.003	0.100	Pass
35	0.020	0.013	0.100	Pass
36	0.000	0.000	0.100	Pass
37	0.020	0.010	0.100	Pass
38	0.000	0.000	0.100	Pass
39	0.020	0.012	0.100	Pass
40	0.000	0.000	0.100	Pass

Environmental Conditions:	23.9°C, 53% RH
Test Model:	YF-A08-SF01-720w
Test Voltage:	AC 230V,50Hz
Test Mode:	Mode 1
Test Engineer:	Sam Chen

Detailed results are shown below

**Test Result: pass**      **Source qualification(Power Off Load): Idle - Pass**

**THC(mA): 141.200**      **I - THD(%): 4.9**      **POHC(mA):57.000**      **POHC Limit(mA):273.392**

**Parameter values during test:**  
**V\_RMS (Volts): 229.3**      **Frequency(Hz): 50.0**  
**I\_RMS(A): 2.9**      **Crest Factor: 1.436**  
**Power (Watts): 650.5**      **Power Factor: 0.980**

Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I_Fund	2881.800						
2	1.000	57.636	1.200	2.082	1.600	1.851	Pass
3	75.100	778.086	75.400	9.690	76.600	6.563	Pass
4	0.800	-	1.000	-	1.400	-	N/A
5	58.000	288.180	57.900	20.092	58.900	13.626	Pass
6	0.700	-	0.900	-	1.000	-	N/A
7	42.600	201.726	42.400	21.019	42.900	14.178	Pass
8	0.700	-	0.700	-	0.800	-	N/A
9	38.300	144.090	38.600	26.789	39.000	18.044	Pass
10	0.800	-	0.900	-	1.000	-	N/A
11	32.000	86.454	31.800	36.783	32.100	24.753	Pass
12	0.700	-	0.700	-	0.800	-	N/A
13	29.400	86.454	29.800	34.469	30.300	23.365	Pass
14	0.700	-	0.700	-	0.800	-	N/A
15	32.100	86.454	31.800	36.783	32.100	24.753	Pass
16	0.700	-	0.800	-	0.800	-	N/A
17	27.500	86.454	28.000	32.387	28.500	21.977	Pass
18	0.700	-	0.700	-	0.800	-	N/A
19	26.900	86.454	26.500	30.652	26.900	20.743	Pass
20	0.700	-	0.800	-	0.800	-	N/A
21	23.700	86.454	24.200	27.992	24.800	19.124	Pass
22	0.700	-	0.800	-	0.800	-	N/A
23	21.500	86.454	21.300	24.637	21.500	16.579	Pass
24	0.700	-	0.800	-	0.800	-	N/A
25	21.300	86.454	21.800	25.216	22.200	17.119	Pass
26	0.800	-	0.800	-	0.800	-	N/A
27	18.100	86.454	17.900	20.705	18.300	14.112	Pass
28	0.800	-	0.800	-	0.800	-	N/A
29	19.900	86.454	20.100	23.249	20.500	15.808	Pass
30	0.700	-	0.800	-	0.800	-	N/A
31	13.100	86.454	13.300	15.384	13.600	10.487	Pass
32	0.700	-	0.800	-	0.800	-	N/A
33	17.200	86.454	17.100	19.779	17.400	13.418	Pass
34	0.700	-	0.800	-	1.000	-	N/A
35	13.600	86.454	14.000	16.194	14.500	11.181	Pass
36	0.800	-	0.800	-	1.000	-	N/A
37	12.500	86.454	12.500	14.459	12.700	9.793	Pass
38	0.800	-	0.900	-	1.000	-	N/A
39	12.000	86.454	11.700	13.533	12.200	9.408	Pass
40	0.800	-	0.900	-	1.000	-	N/A

Note: All harmonics are below the minimum limits and are ignored.



## A.5 Voltage Fluctuations & Flicker Test Results

Environmental Conditions:	23.9°C, 53% RH
Test Model:	YF-A08-SF01-720w
Test Voltage:	AC 230V,50Hz
Test Mode:	Mode 1
Test Engineer:	Sam Chen

Detailed results are shown below

Load Power : 645.9 W 659.0 VA Power Factor 0.980  
 Load Current : 2.9 Arms 4.2 Apk Crest Factor 1.445

EN 61000-3-3:2013 - Voltage reduction is positive

### Voltage Variations

Nominal Voltage: 230 Vrms  
 Highest Half-cycle level: +0.37%  
 Lowest Half-cycle level: +0.52%

d(max): 0.00% Limit: 4% PASS  
 t(max): 0.00seconds Limit: 500ms PASS

Steady State definition: >1000ms within +/- 0.2%

Largest d(c) change down: 0.00%  
 Largest d(c) change up: +0.00%  
 Largest d(c) change: 0.00% Limit: 3.3% PASS

### Flicker

Pst Classifier		Plt Calculation	
Duration	Flicker	Interval	Pst
0.1%	0.01		
0.7%	0.01		
1.0%	0.01		
1.5%	0.01		
2.2%	0.01		
3%	0.00		
4%	0.00		
6%	0.00		
8%	0.00		
10%	0.00		
13%	0.00		
17%	0.00		
30%	0.00		
50%	0.00		
80%	0.00		

**A.6 Immunity Test Results**

<b>Electrostatic Discharge Immunity Test Results</b>								
Standard	<input checked="" type="checkbox"/> EN 61547: 2009		<input checked="" type="checkbox"/> EN 61000-4-2 : 2009					
Applicant	SHENZHEN ABEST LIGHTING CO.,LTD.							
EUT	Foldable led plant grow light	Temperature	23.9°C					
M/N	YF-A08-SF01-720w	Humidity	51%					
Test Mode	Mode 1	Pressure	1008mbar					
Input Voltage	AC 230V,50Hz	Test Results	Pass					
Test Engineer	Sam Chen							
Discharge mode	Test points	Results						Performance Criteria
		2kv		4kv		8kv		
		+	-	+	-	+	-	
Direct-Contact Discharge	Front	P	P	P	P	/	/	B
	Back	P	P	P	P	/	/	B
	Left	P	P	P	P	/	/	B
	Right	P	P	P	P	/	/	B
	Top	P	P	P	P	/	/	B
	Bottom	P	P	P	P	/	/	B
Direct-Air Discharge	Front	P	P	P	P	P	P	B
	Back	P	P	P	P	P	P	B
	Left	P	P	P	P	P	P	B
	Right	P	P	P	P	P	P	B
	Top	P	P	P	P	P	P	B
	Bottom	P	P	P	P	P	P	B
Indirect-Contact Discharge(VCP)	/	P	P	P	P	/	/	B
Indirect-Contact Discharge(HCP)	/	P	P	P	P	/	/	B
Note: "P" = Pass.								

## Radiated, Radio-Frequency, Electromagnetic Field Immunity Test Results

Standard	<input checked="" type="checkbox"/> EN 61547: 2009 <input checked="" type="checkbox"/> EN 61000-4-3: 2006+A2: 2010		
Applicant	SHENZHEN ABEST LIGHTING CO.,LTD.		
EUT	Foldable led plant grow light	Temperature	23.5°C
M/N	YF-A08-SF01-720w	Humidity	53%
Test Mode	Mode 1	Pressure	1008mbar
Input Voltage	AC 230V,50Hz	Test Engineer	Baron.wen
Modulation	80% AM 1KHz	Test Results	Pass
Steps	1%		

Angle of EUT	Antenna polarization	Frequency Range (MHz)	Test Level (V/m)	Performance Criteria
0°	Vertical, Horizontal	80 to 1000	3	A
90°	Vertical, Horizontal	80 to 1000	3	A
180°	Vertical, Horizontal	80 to 1000	3	A
270°	Vertical, Horizontal	80 to 1000	3	A

Note:



## Electrical Fast Transient/Burst Immunity Test Results

Standard	<input checked="" type="checkbox"/> EN 61547: 2009 <input checked="" type="checkbox"/> EN 61000-4-4: 2012				
Applicant	SHENZHEN ABEST LIGHTING CO.,LTD.				
EUT	Foldable led plant grow light	Temperature	24.1°C		
M/N	YF-A08-SF01-720w	Humidity	54%		
Test Mode	Mode 1	Pressure	1008mbar		
Input Voltage	AC 230V,50Hz	Test Results	Pass		
Test Engineer	Sam Chen				
Test Port Type	Test Level	Repetition Frequency	Test Duration		Performance Criteria
			+	-	
AC Power ports	± 1.0kV	5kHz	2min	2min	B
DC Input /Output Power ports					

Note:

## Immunity to Conducted Disturbances, Induced by Radio-Frequency Fields Test Results

Standard	<input checked="" type="checkbox"/> EN 61547: 2009		<input checked="" type="checkbox"/> EN 61000-4-6: 2014+A1:2015	
Applicant	SHENZHEN ABEST LIGHTING CO.,LTD.			
EUT	Foldable led plant grow light	Temperature	24.1℃	
M/N	YF-A08-SF01-720w	Humidity	54%	
Test Mode	Mode 1	Pressure	1008mbar	
Input Voltage	AC 230V,50Hz	Test Results	Pass	
Test Engineer	Sam Chen			
Test Port Type	Frequency range (MHz)	Test Level (V/m)	Coupling method	Performance Criteria
AC Power ports	0.15 to 80	3	CDN	A
DC Input /Output Power ports				
<p>Remark:</p> <p>1.Modulation Signal:1kHz, 80%, AM, Sine wave.</p> <p>2.Measurement Equipment:</p> <p style="padding-left: 20px;">Simulator : CIT-10 (FRANKONIA)</p> <p style="padding-left: 40px;">CDN : <input type="checkbox"/>CDN-M2 (FRANKONIA)</p> <p style="padding-left: 40px;"><input checked="" type="checkbox"/>CDN-M3 (FRANKONIA)</p>				

## Surge Immunity Test Results

Standard	<input checked="" type="checkbox"/> EN 61547: 2009 <input checked="" type="checkbox"/> EN 61000-4-5: 2014+A1:2017		
Applicant	SHENZHEN ABEST LIGHTING CO.,LTD.		
EUT	Foldable led plant grow light	Temperature	24.1℃
M/N	YF-A08-SF01-720w	Humidity	54%
Test Mode	Mode 1	Pressure	1008mbar
Input Voltage	AC 230V,50Hz	Test Results	Pass
Test Engineer	Sam Chen		

Test Port Type	Inject Line	Tset Level (kV)	Phase Angle	Number of surges	Repetition rate	Performance criteria
AC Input	L-N	+ 1.0	90°	5	60s	C
		- 1.0	270°	5	60s	C
AC Input	L-PE	+ 2.0	90°	5	60s	C
		- 2.0	270°	5	60s	C
AC Input	N-PE	+ 2.0	90°	5	60s	C
		- 2.0	270°	5	60s	C
AC Input	L&N-PE	+ 2.0	90°	5	60s	C
		- 2.0	270°	5	60s	C

Note:




## Voltage Dips, Short Interruptions and Voltage Variations Immunity Test Results

Standard	<input checked="" type="checkbox"/> EN 61547: 2009 <input checked="" type="checkbox"/> EN 61000-4-11: 2004+A1:2017			
Applicant	SHENZHEN ABEST LIGHTING CO.,LTD.			
EUT	Foldable led plant grow light	Temperature	24.1℃	
M/N	YF-A08-SF01-720w	Humidity	54%	
Test Mode	Mode 1	Pressure	1008mbar	
Input Voltage	AC 230V,50Hz	Test Results	Pass	
Test Engineer	Sam Chen			
Vnom	Frequency	Test Level	Duration	Performance criteria
AC 230V	50Hz	70% of Vnom	10 cycle(50Hz)	C
AC 230V	50Hz	0% of Vnom	0.5 cycle(50Hz)	B

Note:

## ANNEX B (Test photograph)

### B.1 Photo of Conducted Disturbance

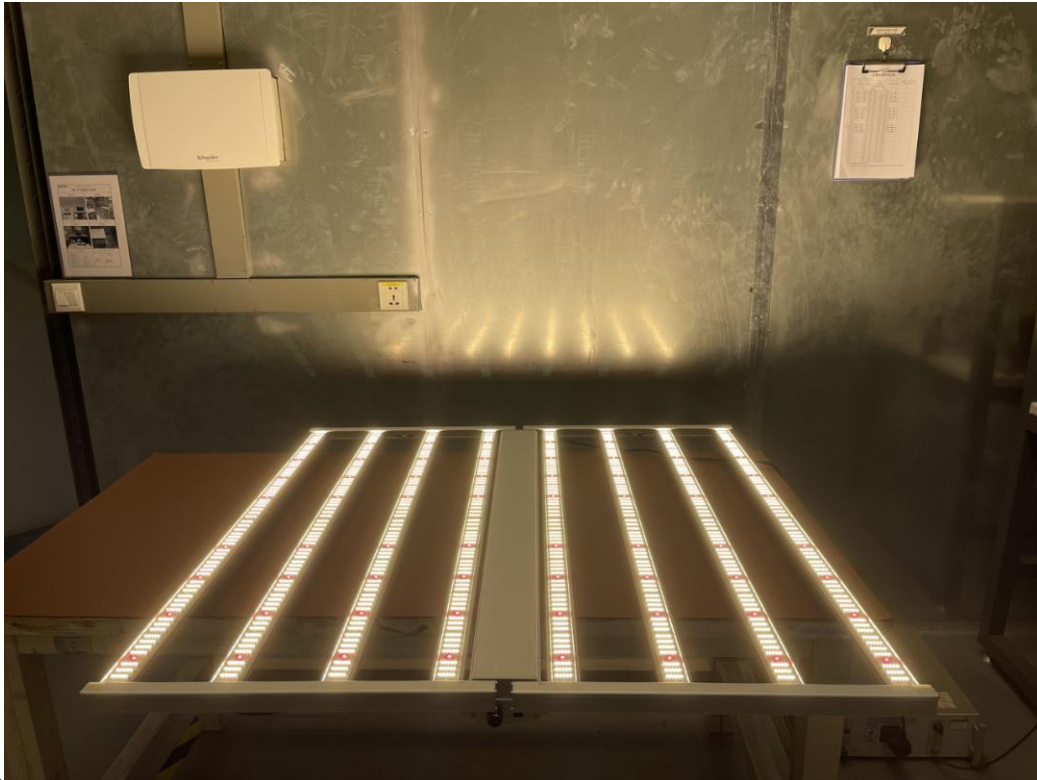

### B.2 Photo of Radiated Disturbance(9kHz to 30MHz)




### B.3 Photo of Radiated Disturbance(30MHz to 1000MHz)




### B.4 Photo of Harmonic Current Emissions & Voltage Fluctuations & Flicker




### B.5 Photo of Electrostatic Discharge Immunity Test

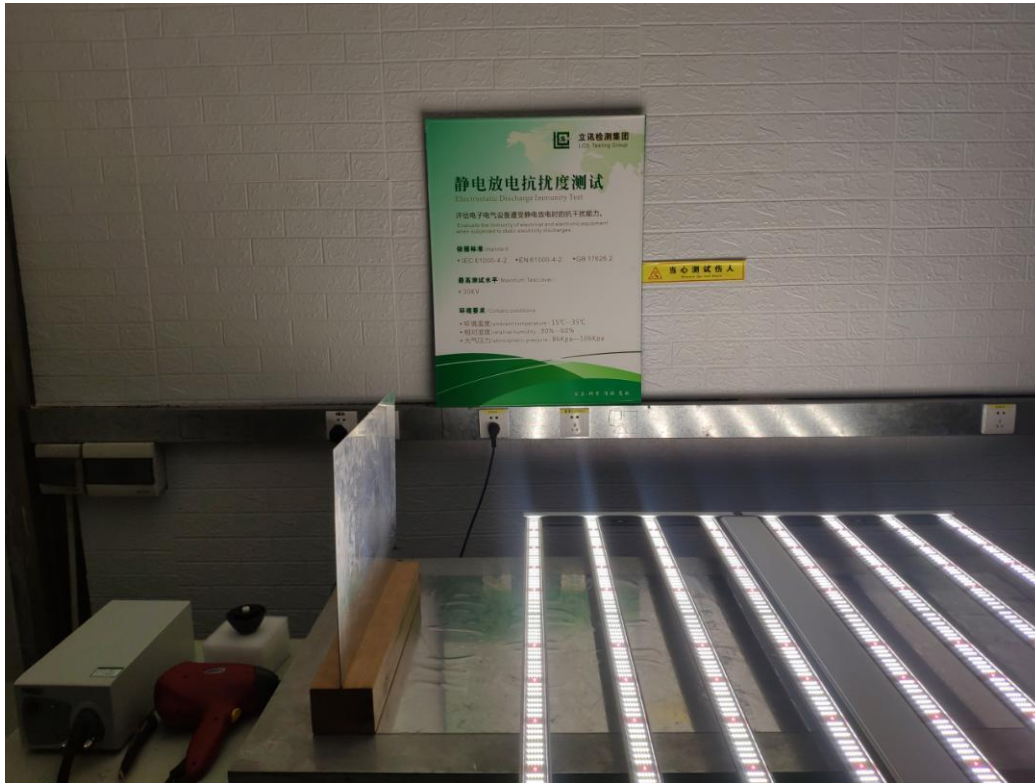

### B.6 Photo of Electrical Fast Transient/Burst Immunity Test

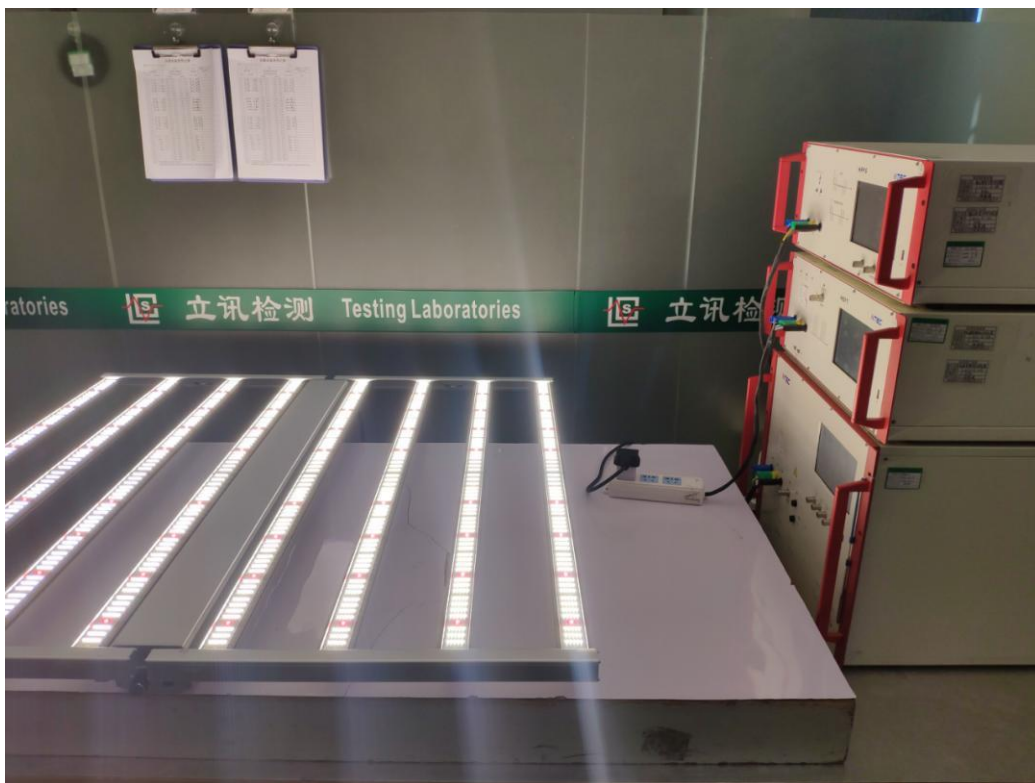

### B.7 Photo of Immunity To Conducted Disturbances, Induced by Radio-Frequency Fields

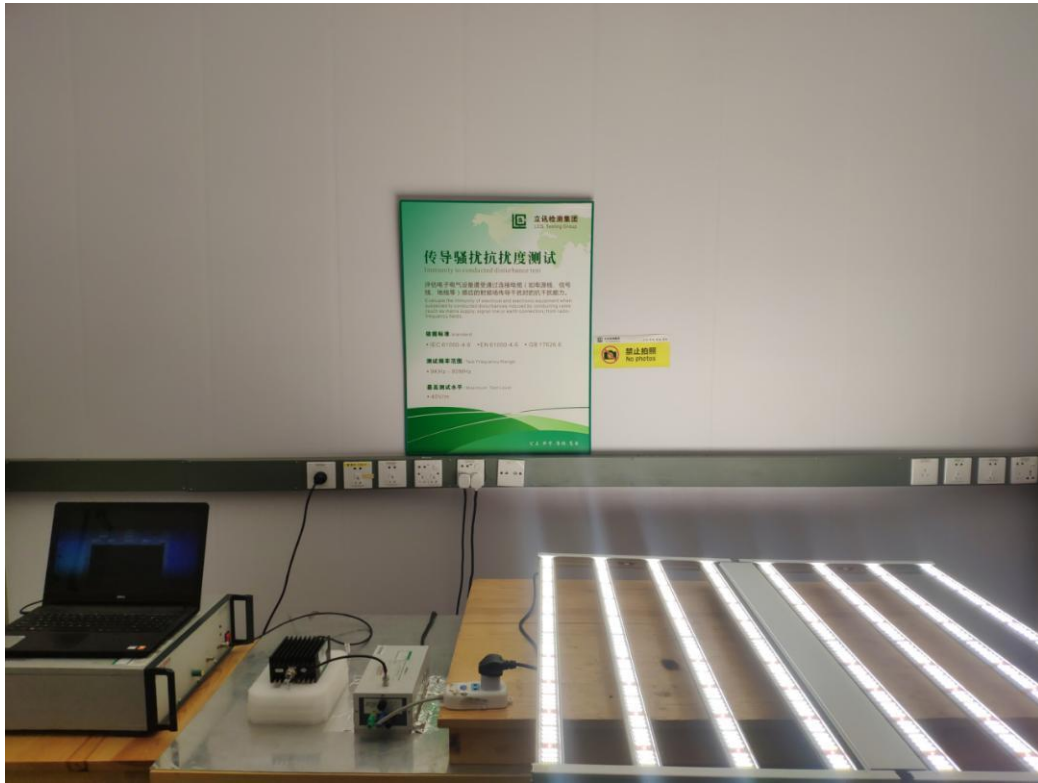


### B.8 Photo of Surge Immunity Test





### B.9 Photo of Voltage Dips, Short Interruptions and Voltage Variations Immunity Test

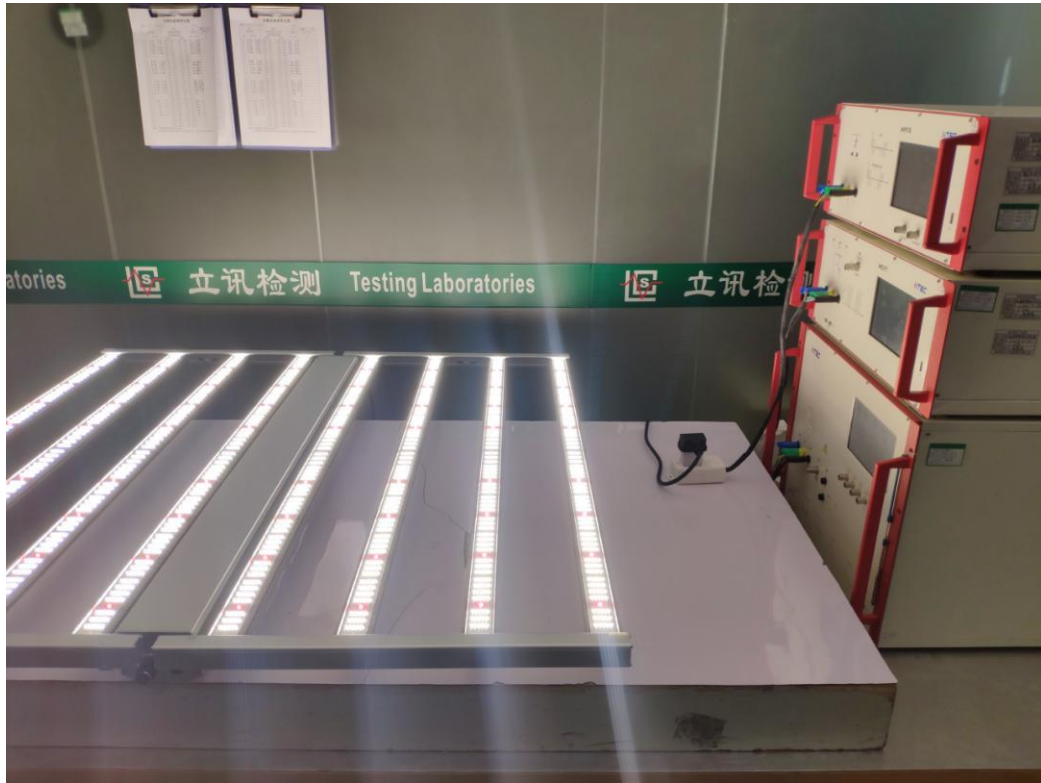

## ANNEX C

(External and internal photos of the EUT)



Figure. 1

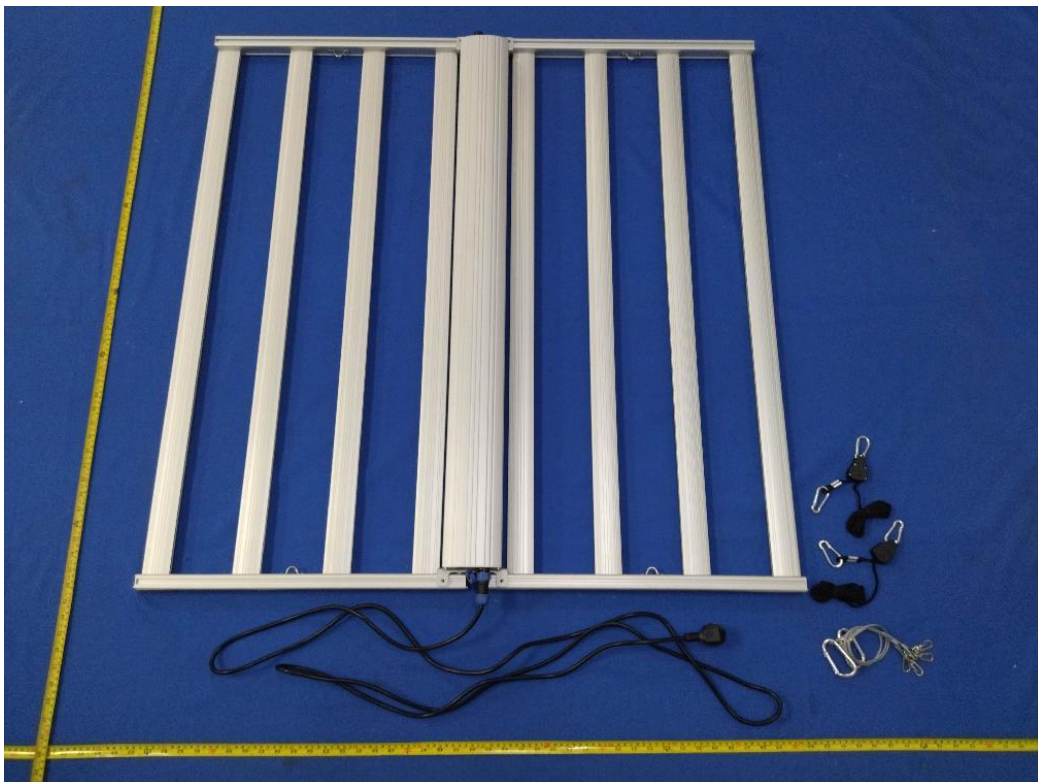


Figure. 2

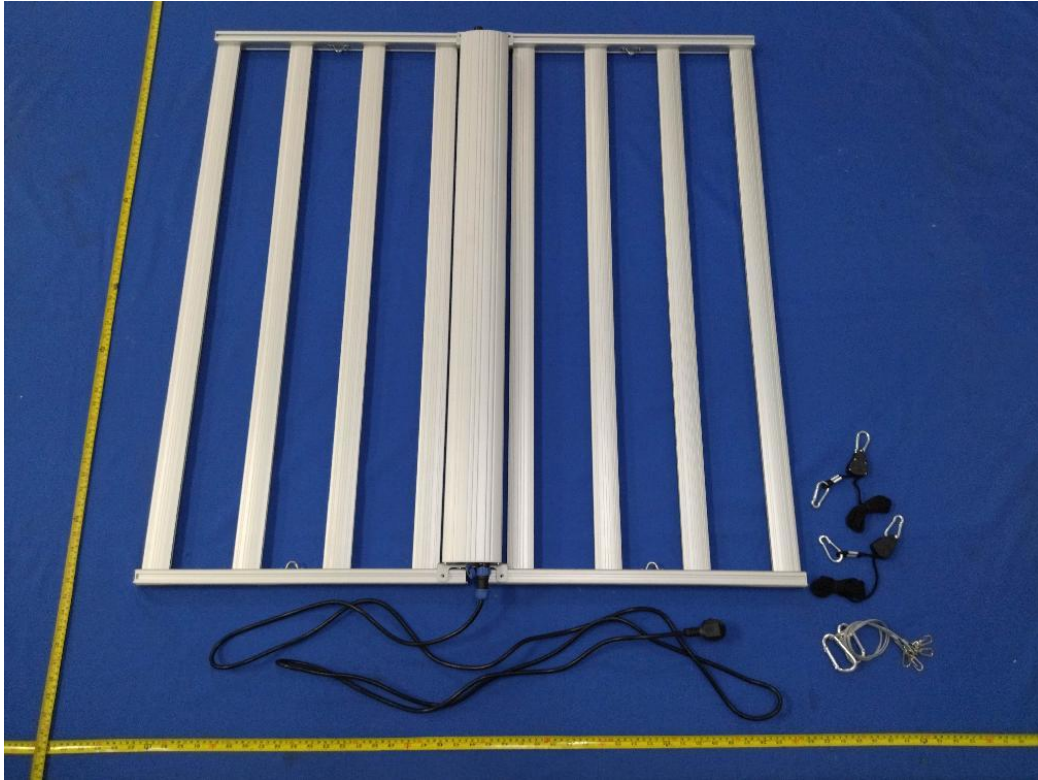


Figure. 3

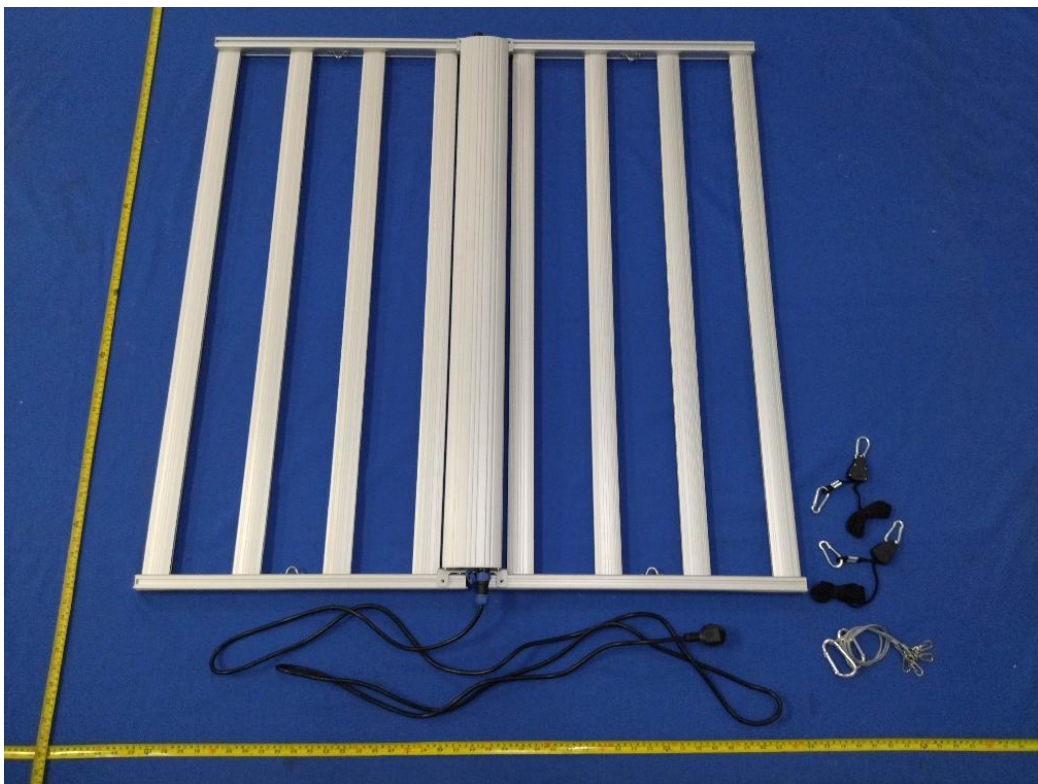


Figure. 4



Figure.5



Figure.6



Figure. 7



Figure. 8

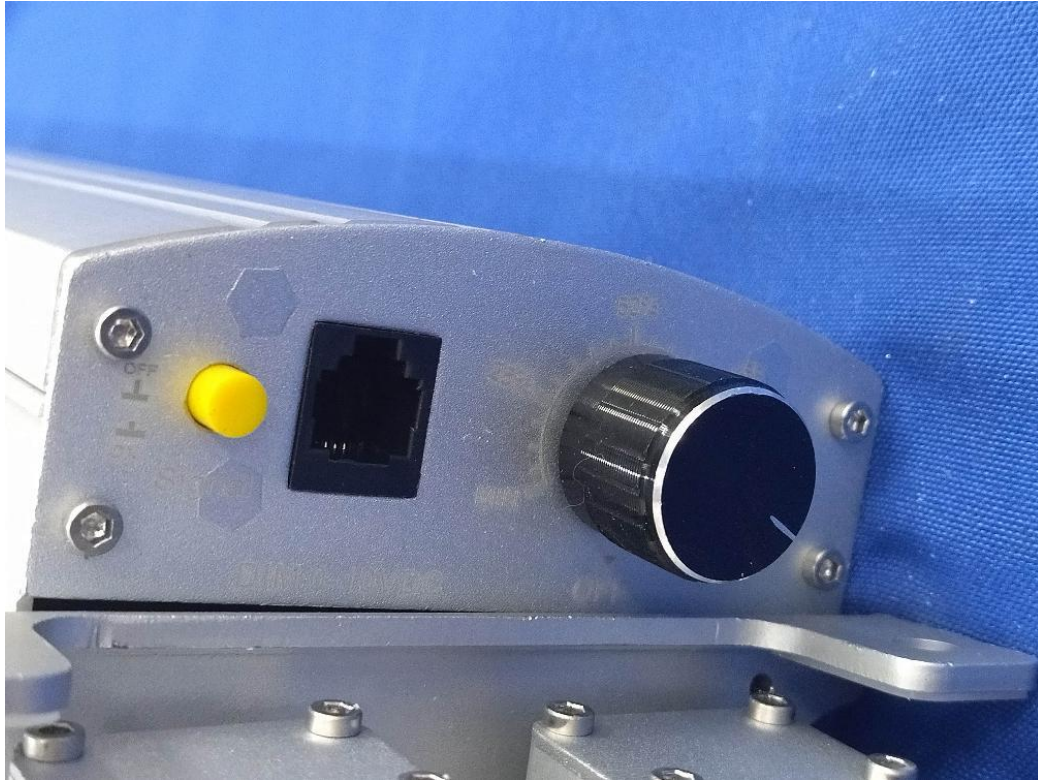


Figure. 9



Figure. 10



Figure. 11



Figure. 12





Figure. 13



Figure. 14



-----THE END OF TEST REPORT-----

*This report shall not be reproduced except in full, without the written approval of Shenzhen Southern LCS Compliance Testing Laboratory Ltd.*